

SPARTUS® SP101H / SP101M





EN 60974-7




Cutting current:	max 100 A
Cooling type:	air cooled
Duty cycle:	60%
Working pressure:	4.5 - 5.0 bar
Min. air cooled flow rate:	180 l/min
Arc ignition:	HF
Post gas flow time:	90s (recomended)


Circle

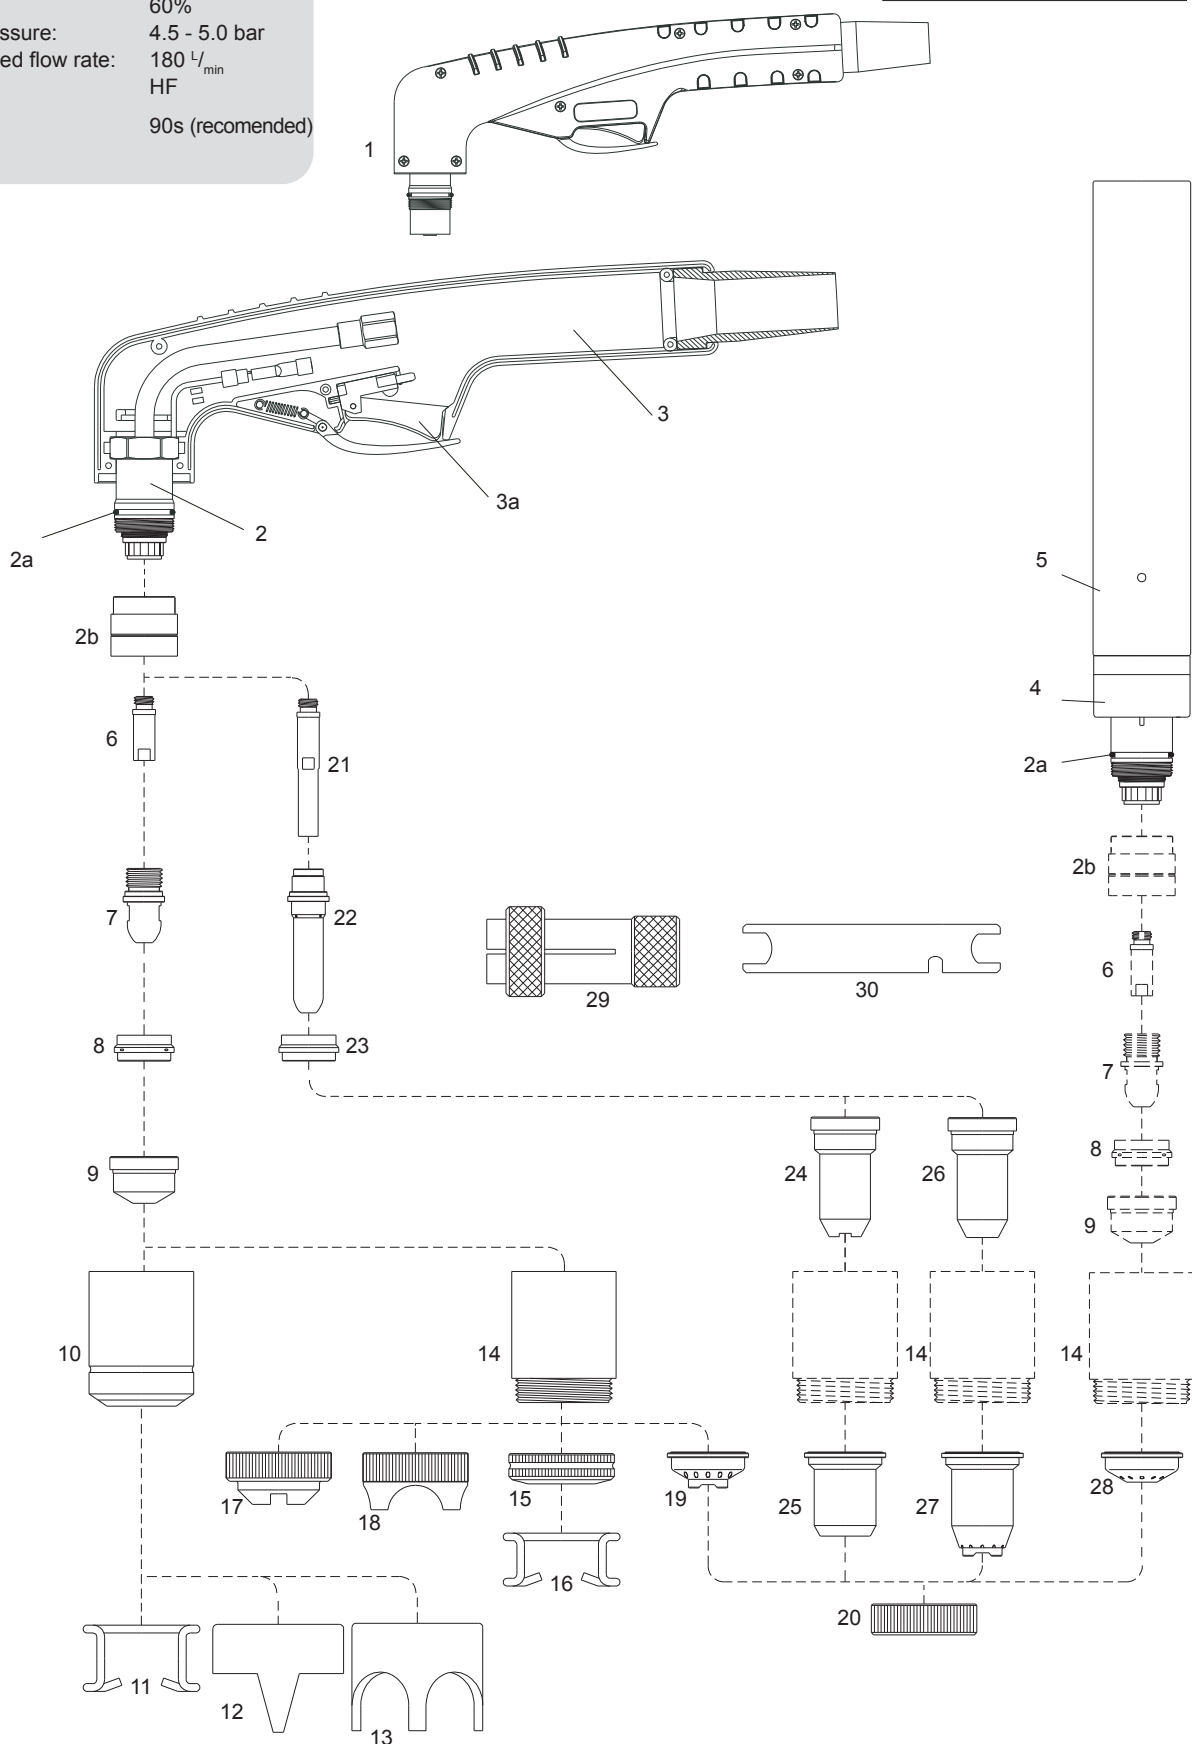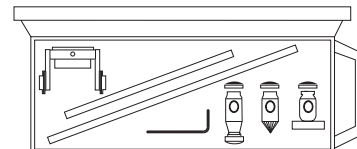

Connection M14x1 lub 1/4"



Central connector



SPARTUS®
SP101H / SP101M

TRAFIMET®
A90 / P90®

ERGOCUT® A101® / AUTOCUT® P101®

CODE	REF. NO.	DESCRIPTION
06050/LT	PA0109 PA1460 PA1454	SP101H Hand torch, 6m (connection M14x1)
06051/LT	PA1452	SP101H Hand torch 6m, (central connector)
06150/LT	PA0209	SP101H Hand torch, 12m (connection M14x1)
06151/LT		SP101H Hand torch, 12m (central connector)
06650	PA0110	SP101M Machine torch, 6m (connection M14x1)
06651	PA0111	SP101M Machine torch, 6m (central connector)
06750		SP101M Machine torch, 12m (connection M14x1)
06751		SP101M Machine torch, 12m (central connector)

... other connections see catalog page 4.05

NO.	CODE	REF. NO.	[H] [M]	DESCRIPTION
1	06001/KIT	PF0145	•	Hand torch head with handgrip
2	06001		•	Hand torch head
2a	06000.60	EA0131	• •	O-ring (20pcs/pck)
2b	60085		• •	Front insulator
3	09706		•	Handgrip with switch
3a	07301.20	BX0020	•	Switch
4	06600	PF0115	•	Machine torch head
5	03310		•	Machine handle
6	06004		• •	Diffusor
7	52535	PR0101	• •	Electrode
8	60030	PE0101	• •	Swirl ring
9	51154	PD0101-11	• •	Tip fi 1.1
	51155	PD0101-14	• •	Tip fi 1.4
	51156	PD0101-17	• •	Tip fi 1.7
10	60376	PC0109 PC0111	•	Retaining cap Long Life
11	51910	CV0011	•	Spacer spring (10 pcs/pck)
12	60370	CV0012	•	Double pointed spacer
13	60371	CV0014	•	Crown spacer
14	60386	PC0113 PC0130	• •	Retaining cap
	60386/V		• •	Contact retaining cap Max Life
15	51952		•	Spring holder protection nut
16	51911		•	Spacer spring (10 pcs/pck)
17	51940	CV0023	•	Spacer for contact cutting
18	51945	CV0039	•	Large spacer for contact cutting
19	51950		•	Spacer for contact cutting, hand
20	51959		• •	Locking nut
21	06005		•	Extended diffusor
22	52530	PR0116	•	Extended electrode (60031)
23	60031	PE0103	•	Swirl ring
24	51149	PD0111	•	Extended tip fi 1.1 max 50A
25	51957	CV0008	•	Shield cap, hand max 50A
26	51149.14	PD0117-14	•	Extended tip fi 1.4
	51149.17	PD0117-17	•	Extended tip fi 1.7
27	51958	CV0009	•	Spacer for contact cutting, hand
28	51951		•	Shield cap, machine
29	60369	GR0060	• •	Extractor for swirl ring
30	60368		• •	Wrench for electrode
	04224		•	Cable, 6m (M14x1); hand torch
	04234		•	Cable, 12m (M14x1) - hand torch
	04222		•	Cable, 6m (M14x1) - machine torch
	04232		•	Cable, 12m (M14x1) - machine torch
	51851		•	Circle cutting attachment

[H] - parts apply for hand torch

[M] - parts apply for machine torch

SPARTUS® is independent brand and not connected to TRAFIMET®. Consumables which are offered at catalogue are produced for SPARTUS® from other manufacturer's documentation.
Reference numbers and names belonged to TRAFIMET® were called due to Property Right Law (art. 156 ust.1, pkt 3) for buyer's convenience and they are related to code and spare part's description.