

SPARTUS® SP151H / SP151M





EN 60974-7




Cutting current: max 150 A
Cooling type: air cooled
Duty cycle: 60%
Working pressure: 4.5 - 5.0 bar
Min. air cooled flow rate: 220 l/min
Arc ignition: HF
Post gas flow time: 90s (recomended)


Circle

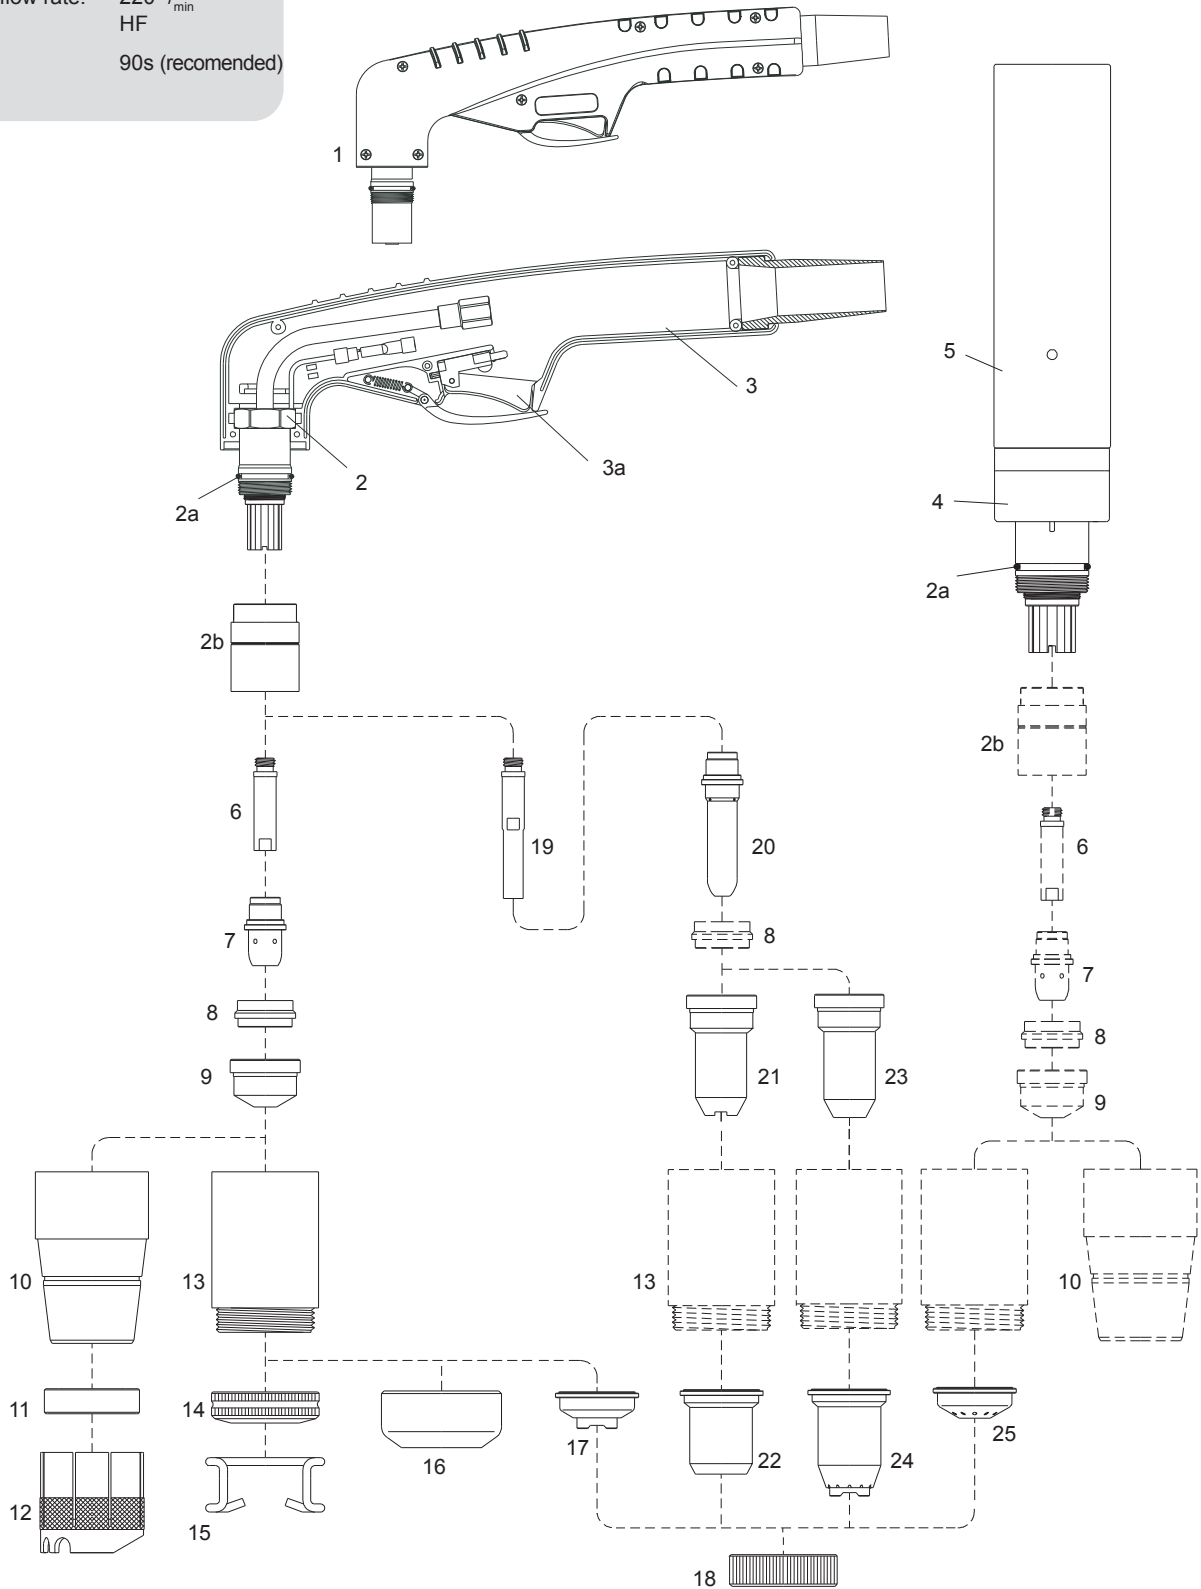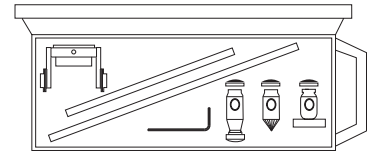

Connection M14x1 lub 1/4"



Central connector



CODE	REF. NO.	DESCRIPTION
06920/LT	PA0129 PA1550 PA1552	SP151H Hand torch, 6m (connection M14x1)
06921/LT	PA1554	SP151H Hand torch, 6m (central connector)
06930/LT	PA0130 PA1551	SP151H Hand torch, 12m (connection M14x1)
06931/LT	PA1555	SP151H Hand torch, 12m (central connector)
06940	PA0127	SP151M Machine torch, 6m (connection M14x1)
06941	PA0252	SP151M Machine torch, 6m (central connector)
06950	PA0128	SP151M Machine torch, 12m (connection M14x1)
06951	PA0253	SP151M Machine torch, 12m (central connector)

... other connections see catalog page 4.05

NO.	CODE	REF. NO.	[H] [M]	DESCRIPTION
1	06901/KIT	PF0160	•	Hand torch head with handgrip
2	06901		•	Hand torch head
2a	06000.60		• •	O-ring (20pcs/pck)
2b	60080		• •	Front insulator
3	09706	BX0020	•	Handgrip with macroswitch
3a	07301.20		•	Switch
4	06910	PF0111	•	Machine torch head
5	03310		•	Machine handle
6	05004		• •	Diffusor
7	52534	PR0111	• •	Electrode
8	60031	PE0103	• •	Swirl ring
9	51241	PD0109-14	• •	Tip fi 1.4
	51242	PD0109-16	• •	Tip fi 1.6
	51243	PD0109-18	• •	Tip fi 1.8
	51244	PD0109-30	•	Gouging tip fi 3.0
10	60387	PC0120	•	Retaining cap
11	60388	BW0139	•	Nozzle shield
12	60379	CV1105	•	Cage spacer
13	60385	PC0103 PC0131	• •	Contact retaining cap
	60385/V		• •	Contact retaining cap Max Life
14	51952		•	Spring holder protection nut
15	51911		•	Spacer spring (10pcs/pck)
16	51953		•	Gouging spacer
17	51950		•	Spacer for contact cutting, hand
18	51959		• •	Locking nut
19	05005		•	Diffusor
20	52530	PR0116	•	Extended electrode
21	51149	PD0111	•	Extended tip fi 1.1 max 50A
22	51957	CV0008	•	Shield cap, hand max 50A
23	51149.14	PD0117-14	•	Extended tip fi 1.4
	51149.17	PD0117-17	•	Extended tip fi 1.7
	51149.19	PD0117-19	•	Extended tip fi 1.9
24	51958	CV0009	•	Spacer for contact cutting, hand
25	51951		•	Shield cap, machine
	04220/S		•	Cable, 6m (M14x1) - hand torch
	04230/S		•	Cable, 12m (M14x1) - hand torch
	04222/S		•	Cable, 6m, (M14x1)- machine torch
	04232/S		•	Cable, 12m, (M14x1) - machine torch
	51851		•	Circle cutting attachment

[H] - parts apply for hand torch

[M] - parts apply for machine torch

SPARTUS® is independent brand and not connected to TRAFIMET®. Consumables which are offered at catalogue are produced for SPARTUS® from other manufacturer's documentation. Reference numbers and names belonged to TRAFIMET® were called due to Property Right Law (art. 156 ust.1, pkt 3) for buyer's convenience and they are related to code and spare part's description.